


Tilting Eave 6w PURE LED

Cat. No. EAVE/T6



PURE LED
Pure Performance

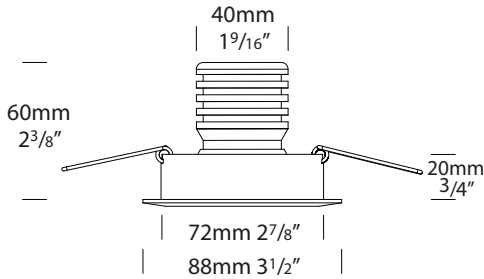

The Tilting Eave Lite 6 watt is a recessed downlight ideal for installation in eaves, soffits, entrance ways, verandahs, carports or covered decks. It can also be used in bathrooms, kitchens or where moisture transfer or decibel rating is a minimum requirement. The "Eyeball" allows 360 degree rotation and 25 degree tilt from centre.

This luminaire is machined from a choice of solid aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear tempered, flush glass lens and high temperature silicon gaskets. The 316 stainless steel version is electro-polished to increase corrosion protection.

The HUNZA PURE LED system uses Cree MTG-2 chips for maximum performance and long life. Power supply options include a choice of integral 12VAC or 9-36VDC drivers. There is an external remote driver (series connection) option also. The PURE LED system incorporates HUNZA's Plug-and-Play system for easy replacement of either the LED engine or integral driver in the field. Four beam angles, and a choice of 2700K, 3000K or 4000K colour temperatures are available.

Ordering Information

Luminaire	Driver mA	Beam Angle	Colour Temp	Accessories	Material/Finish
EAVE/T6	S - Series	15 - 15° TIR Lens	2 - 2700K	STEPF - Frosted Lens	EBK - Black EBZ - Bronze ESTAR - Silver Star EWH - White EDG - Dark Grey COP - Copper SS - Stainless Steel
	D7 - 12VAC 700mA	25 - 25° TIR Lens	3 - 3000K		
	D10 - 12VAC 1050mA	38 - 38° TIR Lens	4 - 4000K		
	DC7 - 9-36VDC 700mA	60 - 60° TIR Lens	39 - 3000K (90+ CRI)		

Ordering Example: EAVE/T6 S 15 4 LENSSTEPF STAR

HUNZATM PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2015 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from:

Body:

High corrosion resistant 45mm (1 49/64"), solid aluminium rod. Anodised

Flange:

Aluminium

88mm (3 1/2") solid aluminium rod with chromate substrate and high UV resistant polyester powder coat. Colours: Black, Bronze, Silver Star, White, Dark Grey.

Copper

88mm (3 1/2") natural Copper

Stainless Steel

88mm 1(3 1/2") solid 316 Stainless Steel. Electro-polished.

Luminaire Weight

Alum .300 kg (11oz)

Cop .800 kg (1lb 12oz)

SS .750 kg (1lb 10oz)

Luminaire Features

Lens

10mm (3/8") extra clear low iron flush fit shatter resistant glass. Lifetime Warranty.

Gaskets

Silicone, iron impregnated 220°C (428°F).

Accessories

Frost Lens (Cat. LENSSTEPF). *The stainless steel E-Lite is electro-polished, this finish increases the protection against corrosion by up to 33%.*

Mounting

This fitting is designed to fit through a 72mm hole and be fixed into position by two spring clips.

Technical Information

Standards

AS/NZS 61046

UL Pending

IP66

LED

Cree MTG-2 Plug and Play, field replaceable LED board.

Lumen Output: 600 at 1050mA

Lumens Per watt: 100 at 6w

CRI Warm White (3000k): 85+

Colour Temp: 2700K, 3000K and 4000K

High CRI Option (3000K): 90+ (lumen output decreases by 15%)

Power Supply

Series (External) Driver

Constant current driver

Output: 6vdc at 1050mA maximum

Integral 12 Volt Driver

Hunza™ Plug and Play Driver

Input: 12vac, 7 watt total

Output: 6vdc nominal, 700/1050mA

Integral 24 Volt Driver

Hunza™ Plug and Play Driver


Input: 9-36vdc, 7 watt total

Output: 6vdc nominal, 700mA


Transformer

Hunza™ Wall Mount Transformer for use with integral 12 volt driver


Beam Angles




15° Angle
3000 K



25° Angle
3000 K

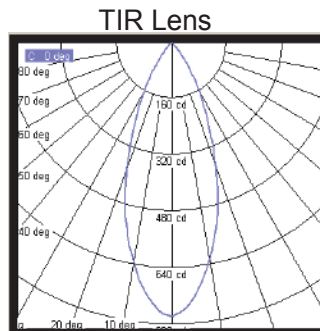

38° Angle
3000 K



60° Angle
3000 K

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2015 Hunza Holdings Ltd.