

Pillar Lite **ULTRA**


PROJECT:	
TYPE:	
SOURCE:	
NOTES:	

SPECIFICATIONS




LED Chip	Cree CXA 2540 field replaceable LED board
Luminaire Output (per end)	2800 Lumens @ 700 (26watts), Delivered from Luminaire with unobstructed beam.
Lumens Per Watt	100 Lumens minimum @ 52 watts, Delivered from Luminaire with unobstructed beam
CRI (3000K)	80 Standard, 90+ Optional
Colour Temperatures	2700K, 3000K, 4000K
Beam Angles	13, 22, 33, 51
Ingress Protection	IP66
Warranty	Electronics = 5 years Body Aluminium = 5 years
Standards	BS/EN 60598.2.2 cUL 1598

CE

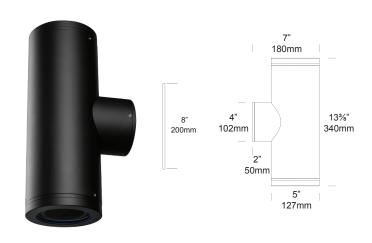

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

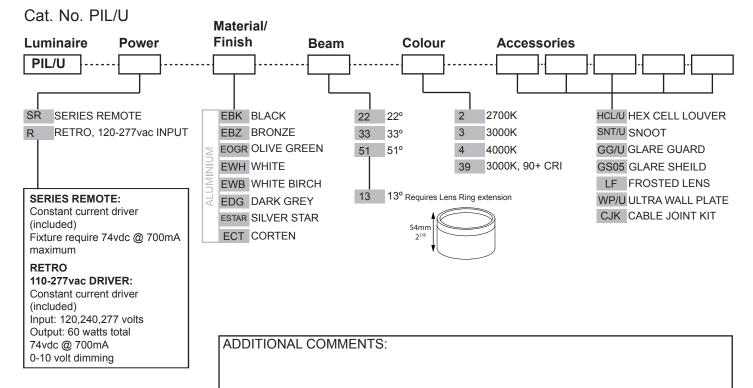

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Body - solid high corrosion resistant 127mm (5") aluminium rod.

Base - high corrosion resistant 127mm (5") x 3.18mm (1/8") aluminium tube.

Finished with chromate substrate, Epoxy layer and a UV resistant polyester powder coat colour.

Fixings and Mechanism - made from 316 Stainless Steel

Black, Bronze, Silver Star, White, Birch, Olive Green, Dark Grey, Corten.

Step Lens:

12mm (1/2") Extra clear, low iron, shatter resistant glass.

Lifetime warranty

Gaskets:

Silicone, iron impregnated 220°C (428°F)

Water resistant rubber


Mounting:

The mounting plate is fixed to the surface using three stainless screws. The luminaire is then fixed to the mounting plate

Luminaire Weight:

8kg (17lbs 10oz)


ACCESSORIES

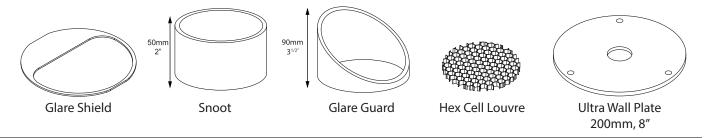


BEAM ANGLES

High efficiency Reflectors. Feild replaceable


IES files available for download: hunzalighting.com/downloads

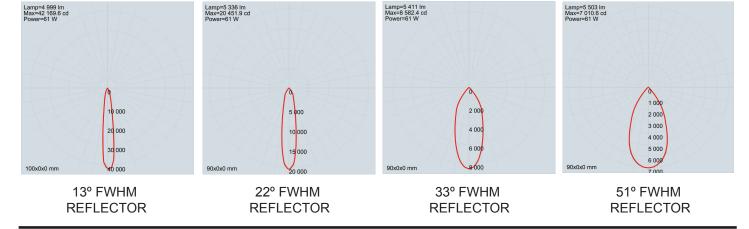

WIRING GUIDE

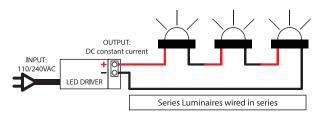

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

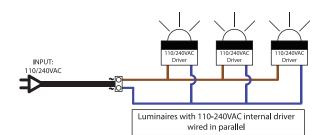

Available for download: hunzalighting.com/downloads

Aug 2017